


FLOOR SCALE LWC-USE

U-scale - Model LWC-USE in steel. Robust, portable, accurate – easy and efficient method to weigh all goods on EU-pallets. Available in two different capacities 2000 kg x 0,5 kg or 3500 kg x 0,5kg. Also available in half pallet size. Weighing indicator LI-101B with many functions. LCD display with backlight. Also available as platform only, without indicator.

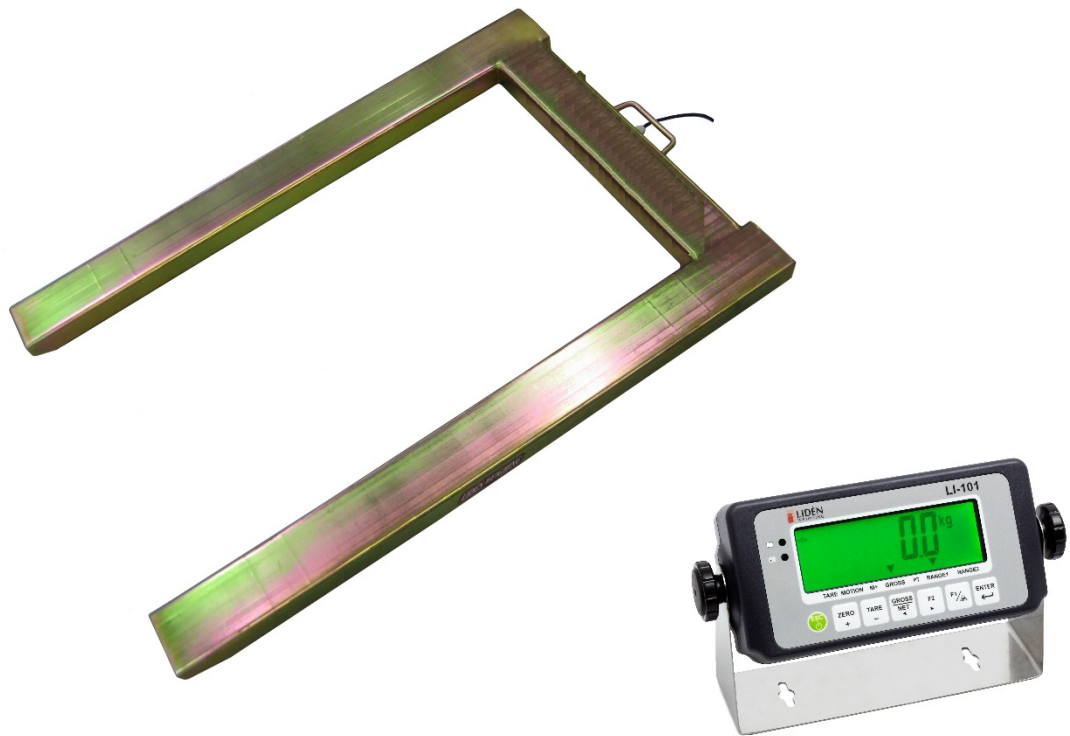

- ✓ Available in two different capacities 2000 kg x 0,5 kg or 3500 kg x 0,5kg
- ✓ U-shaped design, outside dimension 1250 (+handle) x 840 mm (opening 600 mm) Half pallet 625mm x 420mm (opening 600mm)
- ✓ Very robust steel construction, electroplated.
- ✓ Low profile of 78 mm height.
- ✓ 2 built-in wheels makes it easy to move.
- ✓ Designed with four load cells of steel, nickel-plated with protection IP-67.
- ✓ Combined lifting handle and cable protection.
- ✓ Designed to not be damaged by chock loads, load cell support to the floor made by steel and rubber.
- ✓ Indicator LI-101B as standard.

LI-101 (standard till LWC-USE) Specifications:

Analog Specification:

Load cell excitation:	5V DC.
Max. load cell input:	16 mV.
Input sensitivity:	Max: resolution 100.000 Min. 0,15µV / d (1µV/d Approved).
A/D conversion rate:	Max. 120 times / sec.
Resolution:	20 bit processor 500.000 internal resolution.
Number of load cells:	Max. 4 load cells (350 ohm).

Digital Specification:

Display Type:	LCD display with LED backlight. 6 digits, height 25,4 x 10 mm.
Display frequency:	Max. 50 times / sec.
Display range	- 999999 ~ 999999
Display division:	1, 2, 5, 10, 20, 50
Decimal point:	0 to 0.0000
Indicator marks	Zero, Tare, Motion, M+, Gross, Pre-Tare, Range 1, Range 2,

Connectors on Rear panel:

Standard I/F	Scale interface: 9 pin D-sub RS-232 / RS-485: 9 pin D-sub Including RTC Function
--------------	---

Power Requirement:

Adapter specification:	Input: 120/230V AC 50 ~ 60Hz Output: 9V / 1000mA
Standard battery:	6V Hi-MH / 1800mAh, rechargeable battery kit
Power consumption:	120mA (4 load cells + backlight + RS-232) = 15 hours 50mA (1 load cell + no backlight + no RS-232) = 36 hours

General:

Operating temperature	0°C to 40°C
Operating humidity	< 85%RH Max. (Non-condensing)
Net weight	740g including Table/wall bracket.
Dimensions	L 193 x H 134 x D 50 mm