

## Model 355 Welded, Hermetically sealed Load cell



Model 355 is a welded bending load cell manufactured in stainless steel. Hermetically sealed against moisture the model 355 construction and polyurethane shielded cable enables the load cell to function in harsh environments while maintaining its operating specifications.

The low profile, high accuracy and sealing makes this load cell highly suitable for applications such as low profile platforms, weighing and packing machines, conversion of mechanical scales and variety of other applications where

### FEATURES

- Capacities 5 - 500kg
- Stainless steel construction
- Industry standard size and shape
- Hostile environment capability
- Hazardous area approved to EEx ia IIC T6 and FM
- OIML R60 and NTEP approved
- Hermetically sealed to IP68
- 6 wire (sense) circuit

sealed cells are required. For hazardous environments this load cell is available with EEx ia IIC T6 level of approval as an option.

The two additional sense wires feed back the voltage reaching the load cell. Complete compensation of change in the lead resistance due to temperature change and/or cable extension, is achieved by feeding this voltage into the appropriate electronics.

### SPECIFICATIONS

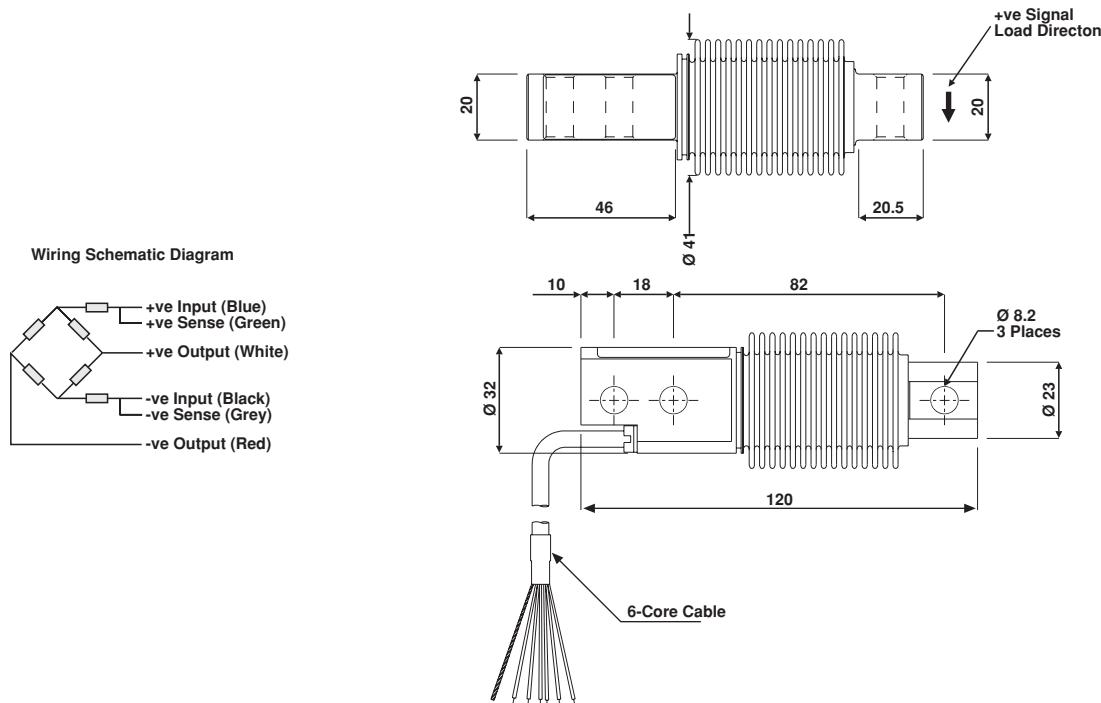
GRADE	E	C2/15	C3**	C4**	UNITS
<b>Rated Capacities</b>		5, 10, 20, 30, 50, 100, 200, 250, 500			kg
<b>Rated Output</b>		2.0 ± 0.1%			mV/V
<b>Total Error*</b>	0.050	0.030	0.020	0.015	± % of applied load
<b>Zero Return after 30 mins</b>	0.050	0.025	0.017	0.013	± % of applied load
<b>Temperature Effect: On Output On Zero</b>	0.004 0.007	0.0017 0.0011	0.0010 0.0014	0.0008 0.0011	± % of applied load/°C ± % of rated output/°C
<b>Zero Balance</b>	3		2		± % of rated output
<b>Temperature Range: Operating Compensated</b>		- 30 to + 80 - 10 to + 40			°C °C
<b>Safe Overload</b>		150			% of rated capacity
<b>Ultimate Overload</b>		300			% of rated capacity
<b>Excitation: Recommended Maximum</b>		10 15			Volts AC or DC Volts AC or DC
<b>Input Impedance</b>		380 ± 10			Ohms
<b>Output Impedance</b>		350 ± 10/-3			Ohms
<b>Insulation Impedance</b>		> 2000			MegaOhms
<b>Deflection at Rated Capacity</b>		< 0.4			mm
<b>Weight: All Types</b>		0.35			kg
<b>Construction</b>		Stainless steel			
<b>Environmental Protection</b>		IP68			
<b>Cable</b>	3 meter (standard), 6 wire, polyurethane jacket, dual floating screen				

\*Total Error - According to OIML R60

Grade C1 available on request

\*\*30% utilization - other utilization factors available

## Model 355 Welded, Hermetically Sealed Load Cell

**DIMENSIONS** in millimeters**VISHAY TRANSDUCERS (VT) - SALES OFFICES**

Contact Info  
 E-mail: info@liden-weighing.se  
 Website: www.liden-weighing.com