

Scale platform KAP-XP

Very robust steel construction with gray powder coating

Type approved weighing platform according to OIML. Robust steel construction, can be used detached or for installation in the floor. The platform is also available in galvanized design, dimensions other than standard are offered separately. Five meter cable from the platform. Add the scale display for your needs and environment.



Load cells IP class 68



Approved OIML Class III

Various standard sizes from 800 x 800 mm. Capacity up to 25 ton

LI-101 scale display. One example of display suitable to the scale platform

Benefits


- ✓ Ramp and immersion kit are available as options
- ✓ Adjustable in height from above
- ✓ Junction box with corner compensation
- ✓ Heavily rugged surface to minimize the risk of slipping
- ✓ Can be used lying on the floor or immersed down into the floor
- ✓ Four steel load cells, class C3, nickel plated with IP class 68 and type approved

Technical specifications	KAP-AP	KAP-AP	KAP-BP	KAP-BP	KAP-CP	KAP-CP	KAP-DP	KAP-EP	KAP-FP
Capacity (kg)	600	1500	600	1500	1500	3000	3000	3000	3000
Readability (kg)	0,2	0,5	0,2	0,5	0,5	1	1	1	1
Platform length (mm)	800	800	1000	1000	1250	1250	1500	1500	2000
Platform width (mm)	800	800	1000	1000	1250	1250	1500	2000	2000
Lacquered platform	✓	✓	✓	✓	✓	✓	✓	✓	✓
Net weight (kg)	80	80	100	100	100	135	135	160	330
Other capacities/sizes	offer	offer	offer	offer	offer	offer	offer	offer	offer


Immersion kit	KAP-AP	KAP-AP	KAP-BP	KAP-BP	KAP-CP	KAP-CP	KAP-DP	KAP-EP	KAP-FP
A (mm)	920	920	1120	1120	1370	1370	1620	2120	2120
B (mm)	820	820	1020	1020	1270	1270	1520	2020	2020
C (mm)	920	920	1120	1120	1370	1370	1620	1620	2120
D (mm)	820	820	1020	1020	1270	1270	1520	1520	2020
H (mm)	120	120	120	120	120	120	120	150	150
Other capacities/sizes	offer	offer	offer	offer	offer	offer	offer	offer	offer

Ramp	KAP-AP	KAP-AP	KAP-BP	KAP-BP	KAP-CP	KAP-CP	KAP-DP	KAP-EP	KAP-FP
A (mm)	800	800	1000	1000	1250	1250	1500	1500	2000
B (mm)	800	800	800	800	800	800	800	1500	1500

Ramp

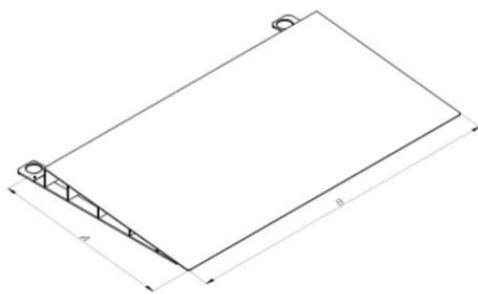

Immersion kit

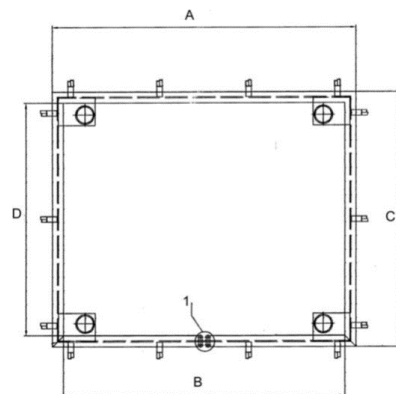

External adjustment



Load cell IP-68



LCD-display with backlight



Summation



CE-marked



Load cell



Animal weighing



Approved OIML Class III



Rechargeable battery



Plastic (ABS)



Approved



Adapter



Metal



Warranty 1 year